



IP44 COLLECTION

Élégance des formes, aux accents minimalistes et aux finitions soignées. Retrouvez l'esprit CVL dans une collection d'appliques esthétiques et fonctionnelles, spécifiquement conçues pour la salle de bain.



Elegant shapes, minimalist accents and immaculate finishes. Find the CVL spirit in a collection of aesthetic and functional wall lights, specifically designed for bathrooms.



IP BACKSTAGE



Finitions Finishes

Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper
Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper

Matériaux Material

Laiton massif Solid Brass	Verre triplex opale soufflé bouche Opal triplex mouth-blown glass
------------------------------	--


Source Lamping

IP Backstage Linear L4			
LED intégrée	480 lm	3000°K	Alimentation 24 V intégrée
Integrated LED	480 lm	3000°K	Remote power supply 24 V incl.
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Backstage Linear L6			
LED intégrée	720 lm	3000°K	Alimentation 24 V intégrée
Integrated LED	720 lm	3000°K	Int. power supply 24 V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Backstage Linear L8			
LED intégrée	960 lm	3000°K	Alimentation 24 V intégrée
Integrated LED	960 lm	3000°K	Int. power supply 24 V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Backstage Corner C4			
LED intégrée	480 lm	3000°K	Alimentation 24 V intégrée
Integrated LED	480 lm	3000°K	Int. power supply 24 V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Backstage Corner C6			
LED intégrée	720 lm	3000°K	Alimentation 24 V intégrée
Integrated LED	720 lm	3000°K	Int. power supply 24 V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Backstage Corner C8			
LED intégrée	960 lm	3000°K	Alimentation 24 V intégrée
Integrated LED	960 lm	3000°K	Int. power supply 24 V included
			IP44 Non variable en standard
			IP44 Standard version not dim.


Designer

Émilie Cathelineau


IP Backstage Linear L8

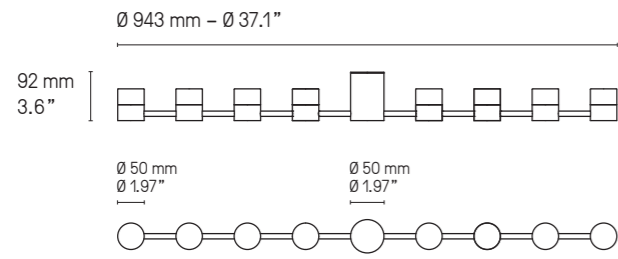


IP Backstage Corner C8

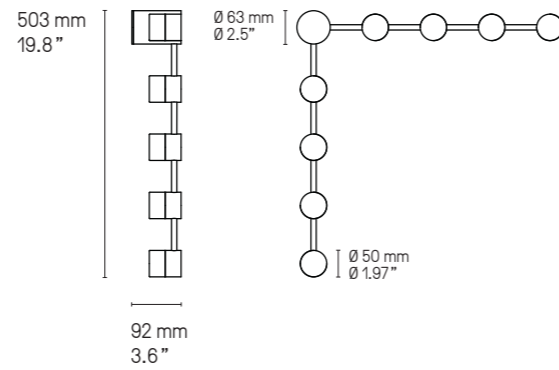


IP Backstage Linear L6

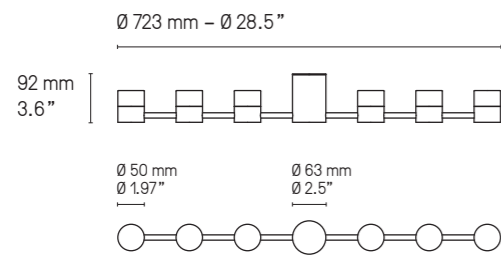


IP Backstage Corner C6

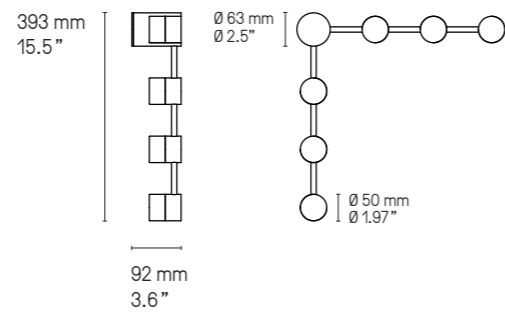

IP Backstage Linear L4

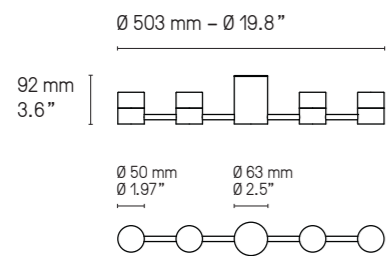

IP Backstage Corner C4

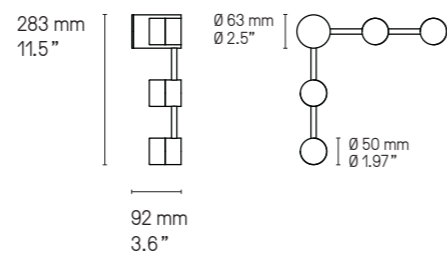

IP Backstage Corner C8 SG



IP Backstage Linear L6 PN



IP Backstage Linear L4 SB



IP Backstage Linear L6 SG




IP CALÉ(E)




Finitions Finishes ①+②	● Laiton satiné SB Satin brass	● Graphite satiné SG Satin graphite	● Nickel satiné SN Satin nickel	● Cuivre satiné SC Satin copper	
	● Laiton poli PB Polished brass	● Graphite poli PG Polished graphite	● Nickel poli PN Polished nickel	● Cuivre poli PC Polished copper	
Matériaux Material	Laiton massif Solid Brass	Diffuseur polycarbonate satiné Satin Polycarbonate diffuser			
Source Lamping	LED intégrée Integrated LED	700 lm 700 lm	3000°K 3000°K	Alimentation 24V intégrée Int. power supply 24V included	IP44 Non variable en standard IP44 Standard version not dim.
Designer	POOL				


V1

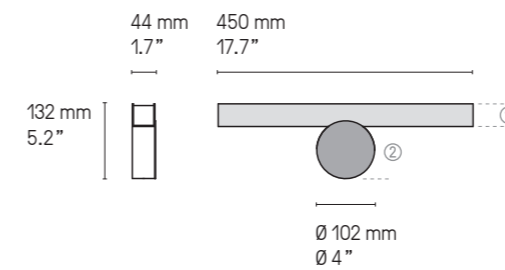

V2

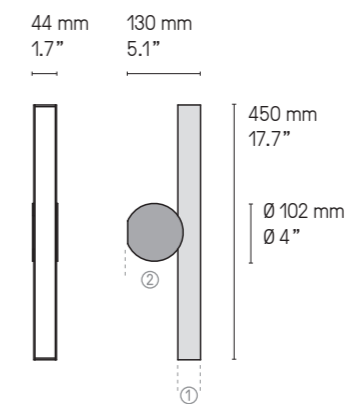

V3

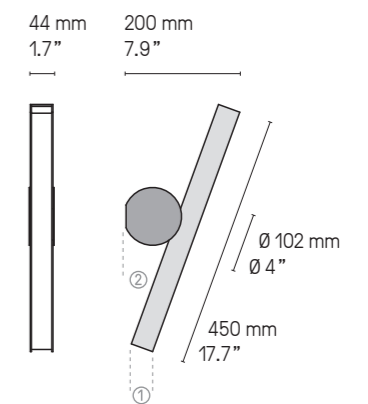


Les appliques Calé(e)s ne sont pas réglables. Ce sont 3 modèles différents.
Calé(e) wall lights are not mobile. These are 3 different fixed models.



IP CORNET



Finitions Finishes	● Laiton satiné SB Satin brass	● Graphite satiné SG Satin graphite	● Nickel satiné SN Satin nickel	● Cuivre satiné SC Satin copper
	● Laiton poli PB Polished brass	● Graphite poli PG Polished graphite	● Nickel poli PN Polished nickel	● Cuivre poli PC Polished copper
Matériaux Material	Laiton massif Solid Brass	Verre triplex opale soufflé bouche Opal triplex mouth-blown glass		
Source Lamping	G9 LED 5W max. non fournie G9 LED 5W max. not included		IP44 Variable IP44 Dimmable	
Designer	POOL			

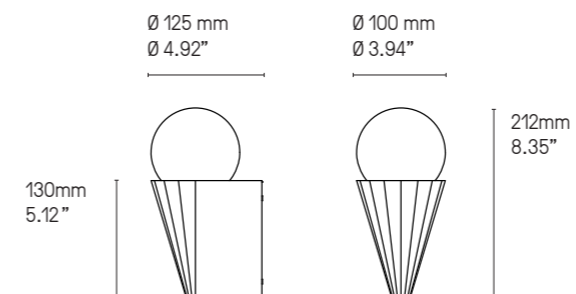









IP Cornet SG



IP GAMMA



Finitions Finishes

 Laiton satiné SB Satin brass	 Graphite satiné SG Satin graphite	 Nickel satiné SN Satin nickel	 Cuivre satiné SC Satin copper
 Laiton poli PB Polished brass	 Graphite poli PG Polished graphite	 Nickel poli PN Polished nickel	 Cuivre poli PC Polished copper

Matériaux Material


Laiton massif Solid Brass	Diffuseur polycarbonate blanc White Polycarbonate diffuser
------------------------------	---

Source Lamping

LED 600lm 3000°K	Alimentation 24V intégrée Int. power supply 24V included	IP44 Non variable en standard IP44 Standard version not dimmable
------------------	---	---

Designer

Sylvain Willenz

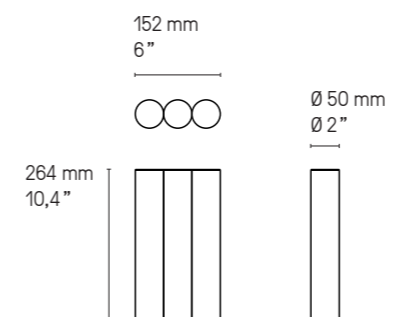

IP Gamma SB

IP Gamma SG

IP Gamma SN

IP Gamma SC



IP LINK



Finitions Finishes

Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper
Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper

Matériaux Material


Laiton massif Solid Brass	Diffuseur polycarbonate satiné Satin Polycarbonate diffuser	Ruban Led sans points visibles Led strip without visible dots
------------------------------	--	--

Source Lamping



IP Link 410 (410 mm - 16.1")			
LED intégrée	150 lm	3000°K	Alimentation 24V intégrée
Integrated LED	150 lm	3000°K	Remote power supply 24V incl.
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Link 580 (580 mm - 22.8")			
LED intégrée	300 lm	3000°K	Alimentation 24V intégrée
Integrated LED	300 lm	3000°K	Int. power supply 24V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Link double 610 (610 mm - 24.1")			
LED intégrée	300 lm	3000°K	Alimentation 24V intégrée
Integrated LED	300 lm	3000°K	Int. power supply 24V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Link double 960 (960 mm - 37.8")			
LED intégrée	600 lm	3000°K	Alimentation 24V intégrée
Integrated LED	600 lm	3000°K	Int. power supply 24V included
			IP44 Non variable en standard
			IP44 Standard version not dim.
IP Link double 1300 (1300 mm - 51.2")			
LED intégrée	800 lm	3000°K	Alimentation 24V intégrée
Integrated LED	800 lm	3000°K	Int. power supply 24V included
			IP44 Non variable en standard
			IP44 Standard version not dim.

Designer

Émilie Cathelineau

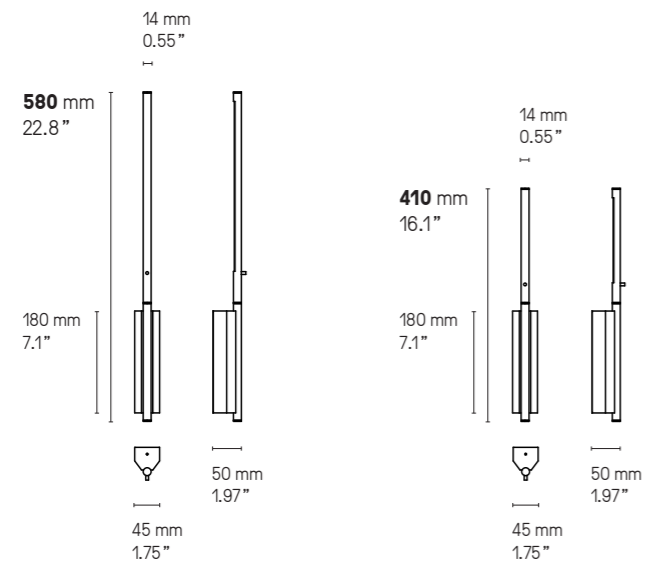

Longueurs sur mesure possibles.
Custom dimensions available upon request.

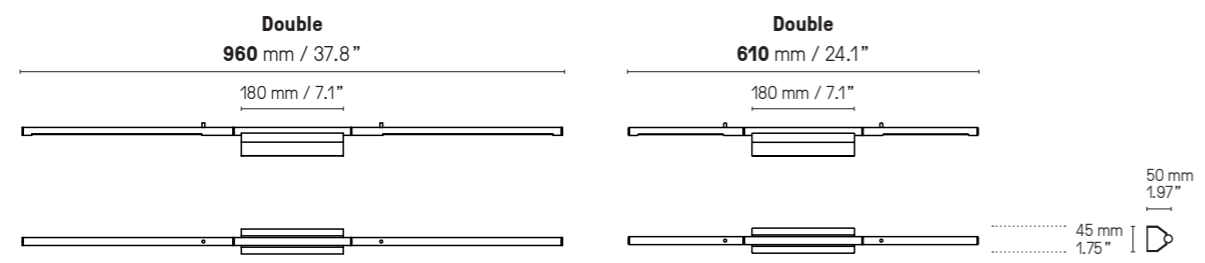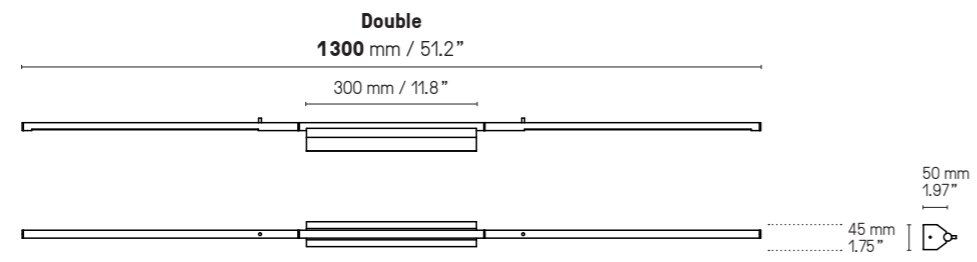

IP Link Double 960 PG



IP Link 410 SB



IP METROP



Finitions Finishes ①+②

● Laiton satiné SB Satin brass	● Graphite satiné SG Satin graphite	● Nickel satiné SN Satin nickel	● Cuivre satiné SC Satin copper
● Laiton poli PB Polished brass	● Graphite poli PG Polished graphite	● Nickel poli PN Polished nickel	● Cuivre poli PC Polished copper

Matériaux Material


Laiton massif Solid Brass	Diffuseur polycarbonate satiné Satin Polycarbonate diffuser
------------------------------	--

Source Lamping

IP Metrop 325					
LED intégrée	300 lm	3000°K	Alimentation 24V intégrée	IP44	Non variable en standard
Integrated LED	300 lm	3000°K	Remote power supply 24V incl.	IP44	Standard version not dim.
IP Metrop 525					
LED intégrée	500 lm	3000°K	Alimentation 24V intégrée	IP44	Non variable en standard
Integrated LED	500 lm	3000°K	Int. power supply 24V included	IP44	Standard version not dim.
IP Metrop 780					
LED intégrée	750 lm	3000°K	Alimentation 24V intégrée	IP44	Non variable en standard
Integrated LED	750 lm	3000°K	Int. power supply 24V included	IP44	Standard version not dim.



Designer

Émilie Cathelineau

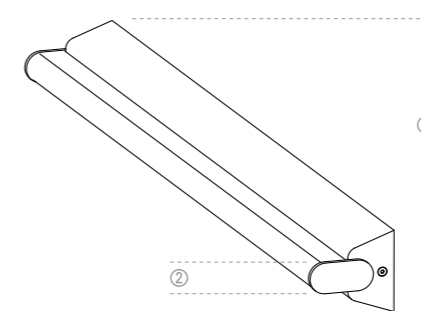

IP Metrop 325 SN/SG

IP Metrop

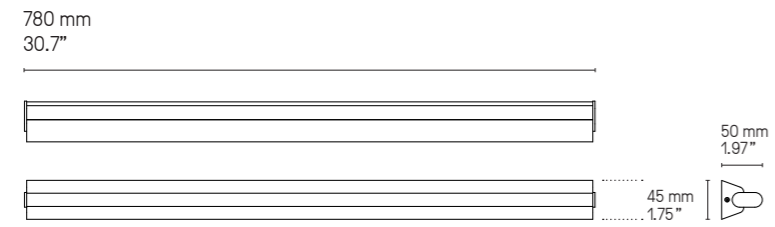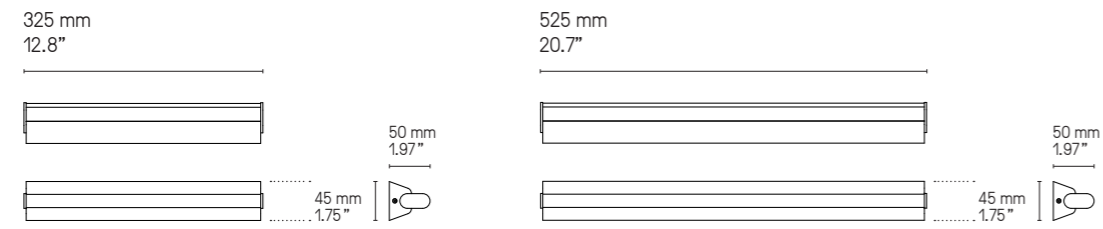

Longueurs sur mesure possibles.
Custom dimensions available upon request.



IP Metrop 325 PN



IP Metrop 325 SG



IP Metrop 325 PB

IP Metrop 325 SB

IP Metrop 525 SN



IP Metrop 525 SG



IP Metrop 325 PC



IP Metrop 325 SC



IP STORM



Finitions Finishes

Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper
Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper

Matériaux Material


Laiton massif Solid Brass	Diffuseur polycarbonate blanc White Polycarbonate diffuser
------------------------------	---

Source Lamping

LED 470 lm 3000°K	Alimentation 24V intégrée Int. power supply 24V included	IP44 Non variable en standard IP44 Standard version not dimmable
-------------------	---	---

Designer

Émilie Cathelineau

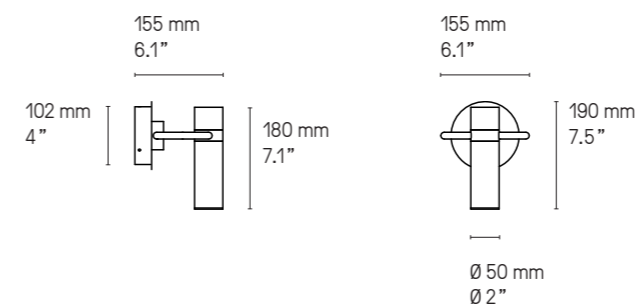

IP Storm SB